


3 Valve Manifold



ERTL offers a series of 3 Valve Manifolds to isolate the differential pressure instrument from the process by incorporating an equalizing valve with two isolation valves in differential pressure applications.

The Three Valve Manifold has many features:

- Single piece bonnet with metal to metal seal to the valve body below the bonnet threads.
- Brass body and brass internals make the manifold compatible for specialty gas applications.
- Two static test ports.
- True flange x flange connections for ease of mounting.

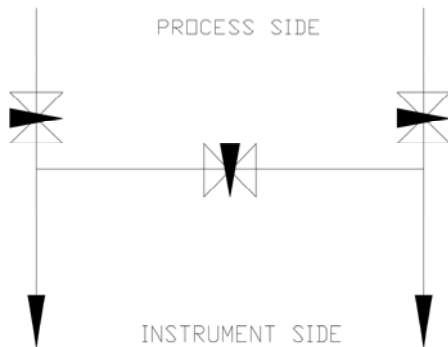

The Three Valve Manifold can be direct-mounted to ERTL's Tru-Flow™ integrated orifice assembly and a differential pressure transmitter to yield a compact, tubing-free DP assembly.

